

## CSS: cómo se usa en HTML (parte 3)



Sergio Luján Mora

Departamento de Lenguajes y Sistemas Informáticos

Universidad de Alicante (España)



## Contacto


- <http://gplsi.dlsi.ua.es/~slujan/>
- <http://accesibilidadenlaweb.blogspot.com.es/>
- <http://accesibilidadweb.dlsi.ua.es/>
- <http://desarrolloweb.dlsi.ua.es/>
- <http://www.youtube.com/user/sergiolujanmora>
- sergio.lujan@ua.es
- @sergiolujanmora


# Atributo style

## Etiqueta <style>

## Etiqueta <link>



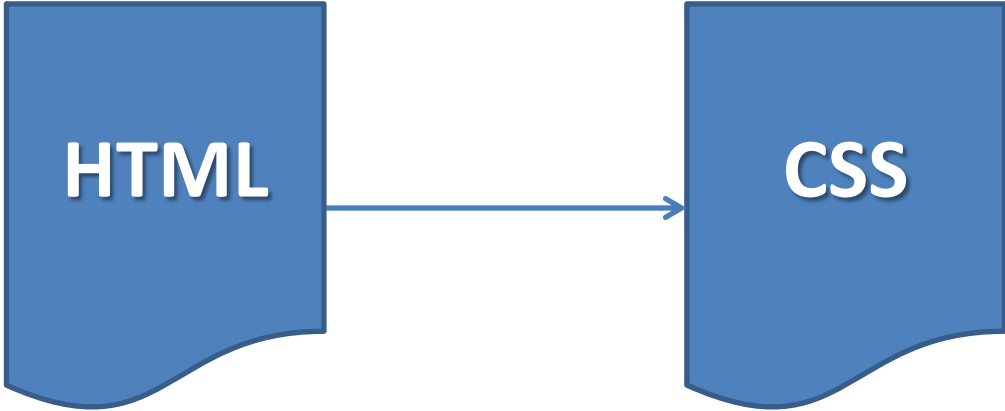

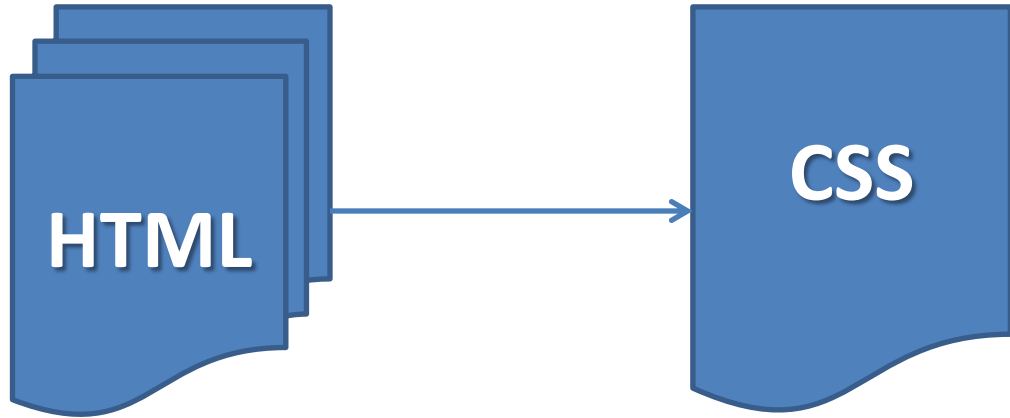

**Etiqueta <link>**

**<link type="text/css">**



**<link>**

```
<link href="" rel="stylesheet" />
```

## 4.2.4 The `link` element

### Categories:

[Metadata content](#).

### Contexts in which this element can be used:

Where [metadata content](#) is expected.

In a [noscript](#) element that is a child of a [head](#) element.

### Content model:

Empty.

### Content attributes:

[Global attributes](#)

[href](#)

[rel](#)

[media](#)

[hreflang](#)

[type](#)

[sizes](#)

Also, the [title](#) attribute has special semantics on this element.

### DOM interface:

IDL

```

interface HTMLLinkElement : HTMLElement {
  attribute boolean disabled;
  attribute DOMString href;
  attribute DOMString rel;

  readonly attribute DOMTokenList relList;
  attribute DOMString media;
  attribute DOMString hreflang;
  attribute DOMString type;
  [PutForwards=value] readonly attribute DOMSettableTokenList sizes;
};
HTMLLinkElement implements LinkStyle;

```

The [link](#) element allows authors to link their document to other resources.

The destination of the link(s) is given by the [href](#) attribute, which must be present and must contain a [valid non-empty URL potentially surrounded by spaces](#). If the [href](#) attribute is absent, then the element does not define a link.

A [link](#) element must have [rel](#) attribute.

The types of link indicated (the relationships) are given by the value of the [rel](#) attribute, which, if present, must have a value that is a [set of space-separated tokens](#). The [allowed keywords and their meanings](#) are defined in a later section. If the [rel](#) attribute is absent, has no keywords, or if none of the keywords used are allowed according to the definitions in this specification, then the element does not create any links.

Two categories of links can be created using the [link](#) element: [Links to external resources](#) and [hyperlinks](#). The [link types section](#) defines whether a particular link type is an external resource or a hyperlink. One [link](#) element can create multiple links (of which some might be external resource links and some might be hyperlinks); exactly which and how many links are created depends on the keywords given in

**Demostración**

**color**

**background-color**

**font-family**

**font-size**

# Atributo style

## Etiqueta <style>

## Etiqueta <link>



<http://idesweb.es/>

**idw@idesweb.es**  
**@idesweb**